


# ORIONE\_20 S3 SRC

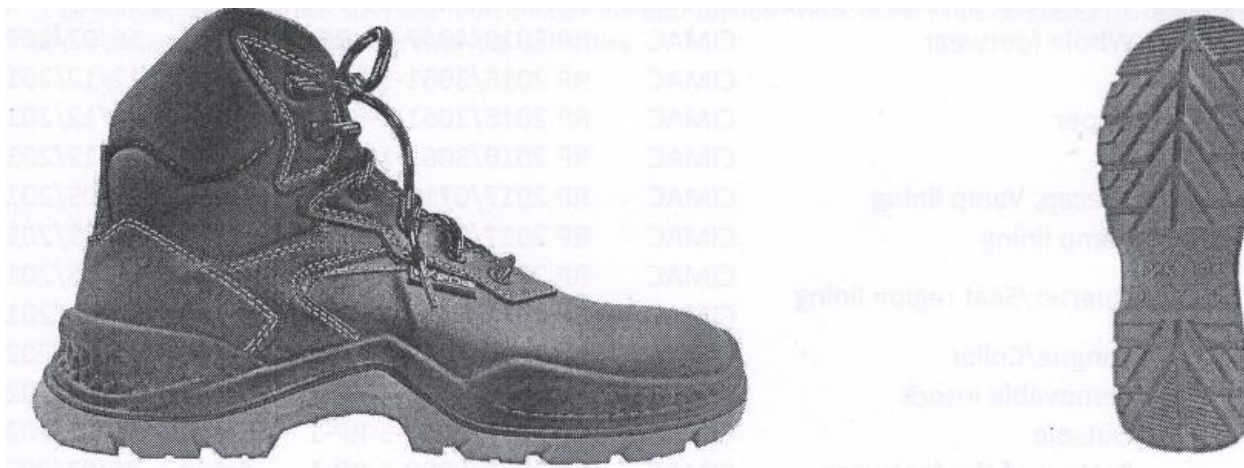

| DESCRIERE                                                             | NORMA EN ISO 20345:2011                                                                                                                                                             | RESULTAT                                                                                              | CERINTE NORMA                                                                                               |
|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Fete:</b> piele autentică, tratament hidrofugant, inserții reflexe | 5.4.3 Rezistentă la sfasiere<br>5.4.6 Coeficient de Permeabilitatea la vapori de apa                                                                                                | 189 N<br>1,2 mg/cm <sup>2</sup> h<br>18,4 mg/cm <sup>2</sup>                                          | ≥120 N<br>≥ 0,8 mg/cm <sup>2</sup> h<br>≥ 15,0 mg/cm <sup>2</sup>                                           |
| <b>Captuseala caputa :</b><br>cu aerisire si rezistenta la abraziune  | 5.5.1 Rezistentă la sfasiere<br>5.5.2 Rezistentă la abraziune (mediu umed)<br>Rezistentă la abraziune (mediu uscat)<br>5.5.3 Coeficient de Permeabilitatea la vapori de apa         | 25 N<br>Fara decupaj<br><br>Fara decupaj<br><br>7,7 mg/cm <sup>2</sup><br><br>62,0 mg/cm <sup>2</sup> | ≥ 15 N<br>25.600 cicluri<br>12.800 cicluri<br><br>≥ 2,0 mg/cm <sup>2</sup><br><br>≥ 20,0 mg/cm <sup>2</sup> |
| <b>Captuseala staif:</b><br>cu aerisire si rezistenta la abraziune    | 5.5.1 Rezistentă la sfasiere<br>5.5.2 Rezistentă la abraziune (mediu umed)<br><br>Rezistentă la abraziune (mediu uscat)<br><br>5.5.3 Coeficient de Permeabilitatea la vapori de apa | 25 N<br>Fara decupaj<br><br>Fara decupaj<br><br>7,7 mg/cm <sup>2</sup><br><br>62,0 mg/cm <sup>2</sup> | ≥ 15 N<br>51.200 cicluri<br>25.600 cicluri<br><br>≥ 2,0 mg/cm <sup>2</sup><br><br>≥ 20,0 mg/cm <sup>2</sup> |
| <b>Bombeau de siguranta:</b><br><b>nemetalic, de siguranță</b>        | 5.3.2.3 Rezistentă la impact<br>5.3.2.4 Rezistentă la compresiune                                                                                                                   | 14,0 mm<br>14,0 mm                                                                                    | ≥ 14 mm<br>≥ 14 mm                                                                                          |

|                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                    |                                                                                                                   |
|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>din policarbonat</b><br><b>Lamela antiperforare:</b><br>brant antiperforare, din material textil | 5.7.1 Grosime<br>5.7.3 Absorbția de apă                                                                                                                                                                                                                                                                                                                                                                                         | 3,5 mm<br>72 mg/cm <sup>2</sup>                                                                    | ≥ 2,0 mm<br>≥70,0 mg/cm <sup>2</sup>                                                                              |
| <b>Acoperis de brant:</b> Talpa interioara detasabila, captusita, antistatica                       | 5.7.4.2 Rezistenta la abraziune (mediu umed)<br>Rezistenta la abraziune (mediu uscat)                                                                                                                                                                                                                                                                                                                                           | Fara perforatii<br>Fara perforatii                                                                 | 25.600 cicluri<br>12.800 cicluri                                                                                  |
| <b>Talpa:</b> PU 2D, talpa aderenta, SRC                                                            | 5.8.2 Rezistenta la sfasiere<br>5.8.3 Rezistenta la abraziune<br>5.8.4 Rezistenta la flexare<br>5.8.5.Hidroliză<br>6.4.2 Rezistenta la uleiuri<br>5.11 Rezistenta la alunecare pe placi ceramice spalate cu detergent<br>Alunecare pe suprafata totala a talpii<br>Alunecare pe calcai<br>Rezistenta la alunecare pe placi din otel acoperite cu glicerina<br>Alunecare pe suprafata totala a talpii<br><br>Alunecare pe calcai | 10,4 kN/m<br>50 mm <sup>3</sup><br>1,5 mm<br>2,5 mm<br>1 %<br><br>0,32<br>0,28<br><br>0,18<br>0,14 | ≥ 8 kN/m<br>≤ 150mm <sup>3</sup><br>≤ 4,0 mm<br>≤ 6,0 mm<br>≤ 12%<br><br>≥ 0,32<br>≥ 0,28<br><br>≥ 0,18<br>≥ 0,13 |

**MARIMI : 35-48**

**EXENA S.r.l.**

Via Breda, 7/A – Zona Ind.le A 62012 – CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519 C.F. e P. IVA: 01336080435 – Reg.Imprese MC n.01336080435 – REA MC144207 [www.exena.it](http://www.exena.it) – info@exena.it - pec: [amministrazione@pec.exena.it](mailto:amministrazione@pec.exena.it)

Subsemnata **MIHAELA CARMEN LECA**, traducator si interpret autorizat de Ministerul Justitiei cu nr. 14606/07.11.2018 pentru LIMBA ENGLEZA, certific exactitatea acestei traduceri efectuata de mine la cererea partii, conform textului autentic, vizat de mine.Traducatorul nu isi asuma responsabilitatea pentru continutul acestui document.

## ORIONE 20 S3 SRC



| DESCRIPTION                                                              | NORM EN ISO 20345:2011                                                                                                                                                                                                                                                                   | RESULT                                                                                            | REQUIREMENT                                                                                                        |
|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>UPPER:</b> Genuine leather, water repellent treatment, reflex inserts | 5.4.3 Tear strength<br>5.4.6 Water vapour permeability Coefficient                                                                                                                                                                                                                       | 189 N<br>1,2 mg/cm <sup>2</sup> h<br>18,4 mg/cm <sup>2</sup>                                      | ≥ 120 N<br>≥ 0,8 mg/cm <sup>2</sup> h<br>≥ 15,0 mg/cm <sup>2</sup>                                                 |
| <b>VAMP LINING:</b> Breathable, abrasion resistance.                     | 5.5.1 Tear strength<br>5.5.2 Abrasion resistance(Wet)<br>Abrasion resistance(Dry)<br>5.5.3 Water vapor permeability Coefficient                                                                                                                                                          | 25 N<br>No holes<br>No holes<br>7,7mg/cm <sup>2</sup> h<br>62,0 mg/cm <sup>2</sup>                | ≥ 15 N<br>25.600 cycles<br>12.800 cycles<br>≥ 2,0 mg/cm <sup>2</sup><br>≥ 20,0 mg/cm <sup>2</sup>                  |
| <b>QUARTER LINING:</b> Breathable, abrasion resistance.                  | 5.5.1 Tear strength<br>5.5.2 Abrasion resistance(Wet)<br>Abrasion resistance(Dry)<br>5.5.3 Water vapor permeability Coefficient                                                                                                                                                          | 25 N<br>No holes<br>No holes<br>7,7 mg/cm <sup>2</sup> h<br>62,0 mg/cm <sup>2</sup>               | ≥ 15 N<br>51.200 cycles<br>25.600 cycles<br>≥ 2,0 mg/cm <sup>2</sup><br>≥ 20,0 mg/cm <sup>2</sup>                  |
| <b>SAFETY TOE CAP:</b> Non-metallic polycarbonate safety toe.            | 5.3.2.3 Impact resistance<br>5.3.2.4 Compression resistance                                                                                                                                                                                                                              | 14,0 mm<br>14,0 mm                                                                                | ≥ 14 mm<br>≥ 14 mm                                                                                                 |
| <b>PIERCE-RESISTANCE:</b> Textile pierce proof footbed,                  | 5.7.1. Thickness<br>5.7.3 Water absorption                                                                                                                                                                                                                                               | 3,5 mm<br>72 mg/cm <sup>2</sup>                                                                   | ≥ 2,0 mm<br>≥ 70,0 mg/cm <sup>2</sup>                                                                              |
| <b>FOOTBED:</b> Removable, cushioned, antistatic insole.                 | 5.7.4.2 Abrasion resistance(Wet)<br>Abrasion resistance(Dry)                                                                                                                                                                                                                             | No holes<br>No holes                                                                              | 25.600 cycles<br>12.800 cycles                                                                                     |
| <b>OUTSOLE:</b> PU 2D, Antislip sole, SRC                                | 5.8.2 Tear strength<br>5.8.3 Abrasion resistance<br>5.8.4 Flexing resistance<br>5.8.5 Hydrolysis<br>6.4.2 Oils resistance<br>5.11 Pressed ceramic tile floor on detergent resistance<br>Flat slip<br>Heel slip<br>Stainless steel plate on glycerin resistance<br>Flat slip<br>Heel slip | 10,4 kN/m<br>50 mm <sup>3</sup><br>1,5 mm<br>2,5 mm<br>1%<br><br>0,32<br>0,28<br><br>0,18<br>0,14 | ≥ 8 kN/m<br>≤ 150 mm <sup>3</sup><br>≤ 4,0 mm<br>≤ 6,0 mm<br>≤ 12%<br><br>≥ 0,32<br>≥ 0,28<br><br>≥ 0,18<br>≥ 0,13 |

**SIZES : 35-48**

**EXENA S.r.l.**

Via Breda, 7/A – Zona Ind.le A 62012 – CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519

C.F. e P. IVA: 01336080435 – Reg.Imprese MC n.01336080435 – REA MC144207

www.exena.it – info@exena.it – pec: [amministrazione@pec.exena.it](mailto:amministrazione@pec.exena.it)

---


Traducere din limba engleza - in conformitate cu documentul

**EXENA**  
**DECLARATIE DE CONFORMITATE UE**  
**M22 -Ver. 00**

Conform regulamentului (UE) 2016/425 – Anexa IX, Exena srl DECLARA ca echipamentul individual de protectie si lotul corespunzator de productie descris mai jos:

Articol: **ORIONE\_20**

Lot: 63532

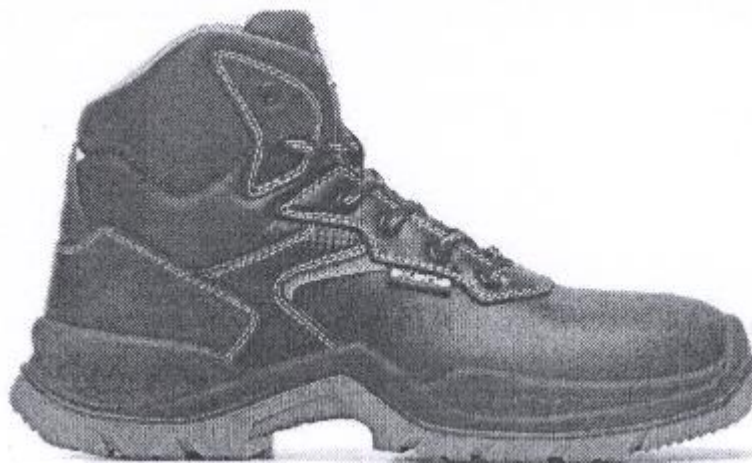

Este in conformitate cu standardul: EN ISO 20345:2011

Clasa: II

Categoria de marcaj: **S3 SRC**

Nr. certificat: F-130-03277-20

Data: **30/03/2020**

EMIS DE: CIMAC – 0465

Civitanova Marche, **21/05/20**

Aplicata parafa firmei EXENA S.R.L.

Sediul in Via Breda, 7/A

Civitanova Marche      Semnatura ilizibila

EXENA S.r.l.

Via Breda, 7/A – Zona Ind.le A 62012 – CIVITANOVA MARCHE (MC) ITALY –

Telefon:+390733897256 – Fax:+390733-897519

C.F.e P. IVA: 01336080435 – Reg. Imprese MC n. 01336080435 – REA MC144207

[www.exena.it](http://www.exena.it) - [info@exena.it](mailto:info@exena.it) – pec :[amministrazione@pec.exena.it](mailto:amministrazione@pec.exena.it)

---

*Sfârșitul traducerii*

Traducător autorizat,

Subsemnata **MIHAELA CARMEN LECA**, traducator si interpret autorizat de Ministerul Justitiei cu nr. 14606/07.11.2018 pentru LIMBA ENGLEZA, certific exactitatea acestei traduceri efectuata de mine la cererea partii, conform textului autentic, vizat de mine. Traducatorul nu isi asuma responsabilitatea pentru continutul acestui document.

## DECLARATION OF CONFORMITY UE

M22 - Ver.00

As per Regulation (UE) 2016/425 - Annex IX, Exena Srl declares that the ppe and the relative production batch below described:

item

**ORIONE\_20**

batch:

**63532**



conforms to the standard:

**EN ISO 20345:2011**

class:

**II**

marking category:

**S3 SRC**

certificate numb.:

**F-130-03277-20**

date:

**30/03/2020**

issued by:

**CIMAC - 0465**

Civitanova Marche

21/05/20

**EXENA S.r.l.**  
Via Breda, 7/A - Zona Ind.le A  
Tel. 0733 897256 Fax 0733 897519  
62012 CIVITANOVA MARCHE - MC  
P. IVA 01336080435  
**CEO**

**EXENA S.r.l.**

Via Breda, 7 - Z.na Ind. A 62012 - CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519

P. IVA: 01336080435 - Reg. Impr. Trib. MC N. 21676/1998 - CCIAA MC 22988

www.exena.it - info@exena.it - pec: amministrazione@pec.exena.it